

Injector Door Ltd.
 Eystein Elttør
 Tel.: +298 28 06 06
 Mail: ee@injector-door.eu
 Web: www.injector-door.eu



W: Main wire connection
 a-b: Upper and lower towing point
 B: Middle chain connection on back
 C: Upper & lower chain connection on back


Increase spread (AOA): Connect to a higher no. in point W and/or in point B
 Decrease spread (AOA): Connect to a lower no. in point W and/or in point B

Tilt door inwards: If the doors tend to fall on back, the lower chain should be shorten in point C
 Tilt door outwards: If the doors tends to fall on wire side, the upper chain should be shorten in point C

IMPORTANT – DO IT LINK BY LINK

Tilt door outwards: If the doors tend to tilt inwards in shallow waters fishing, move shackle in towing point b

Chain lengths: Chain lengths are from attachment point on door (including shackle) to the connection ring

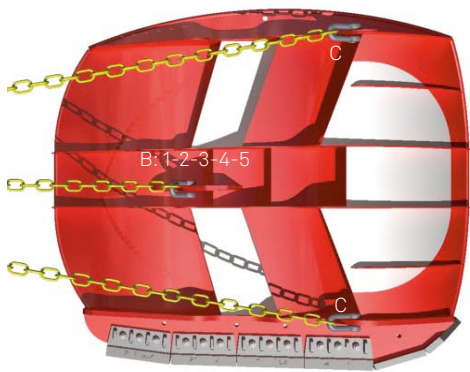

SUGGESTED STARTING POINT: MEDIUM AOA SETTINGS



W 2a: Main wire connection
 B 2: Middle chain connection
 C: Upper and Lower chain connection

DECREASE AOA: MINIMUM AOA SETTINGS



W 1a: Main wire connection
 B 1: Middle chain connection
 C: Upper and Lower chain connection

INCREASE AOA: MAXIMUM AOA SETTINGS



W 3a: Main wire connection
 B 3: Middle chain connection
 C: Upper and Lower chain connection